




# GERAND ENGINEERING

2300 EDGEWOOD AVE S, MINNEAPOLIS, MN 55426  
952.374.1320 WWW.GERAND.COM

## FIRE PUMP TEST METER K-3000-10

### CONSTRUCTION & SPECIFICATIONS

|                |                                                                                                                                                                                                                     |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS:     | CA36 ASTM B16 BRASS                                                                                                                                                                                                 |
| VALVES:        | RATED AT 600 WOG<br>VALVE BODY: CAST BRONZE ASTM B584<br>TAIL PIECE: CA-360 B-16<br>BALL: BRASS CA-360 HARD CHROME P<br>LATED SEALS: REINFORCED PTFE, 15%<br>GLASS FILLED HANDLE: STEEL ASTM B633<br>W/ZINC PLATING |
| BRASS FITTING: | PIPE NIPPLE - B16 / 1/8" NEEDLE VALVE-B16<br>DISCONNECTS-B16                                                                                                                                                        |
| ID TAG:        | CHAIN: BRASS<br>TAG: ALUMINUM -3.21" THICK #200 MILL<br>SET SCREW: STEEL ZINC PLATED                                                                                                                                |
| HOSES:         | GOODYEAR 3/16" FREON CHARGING HOSES<br>WITH NYTRIEE CORE, POLYESTER BRAID<br>AND NYTRILE COVER WITH PVC<br>FOR ABRASION RESISTANCE.                                                                                 |

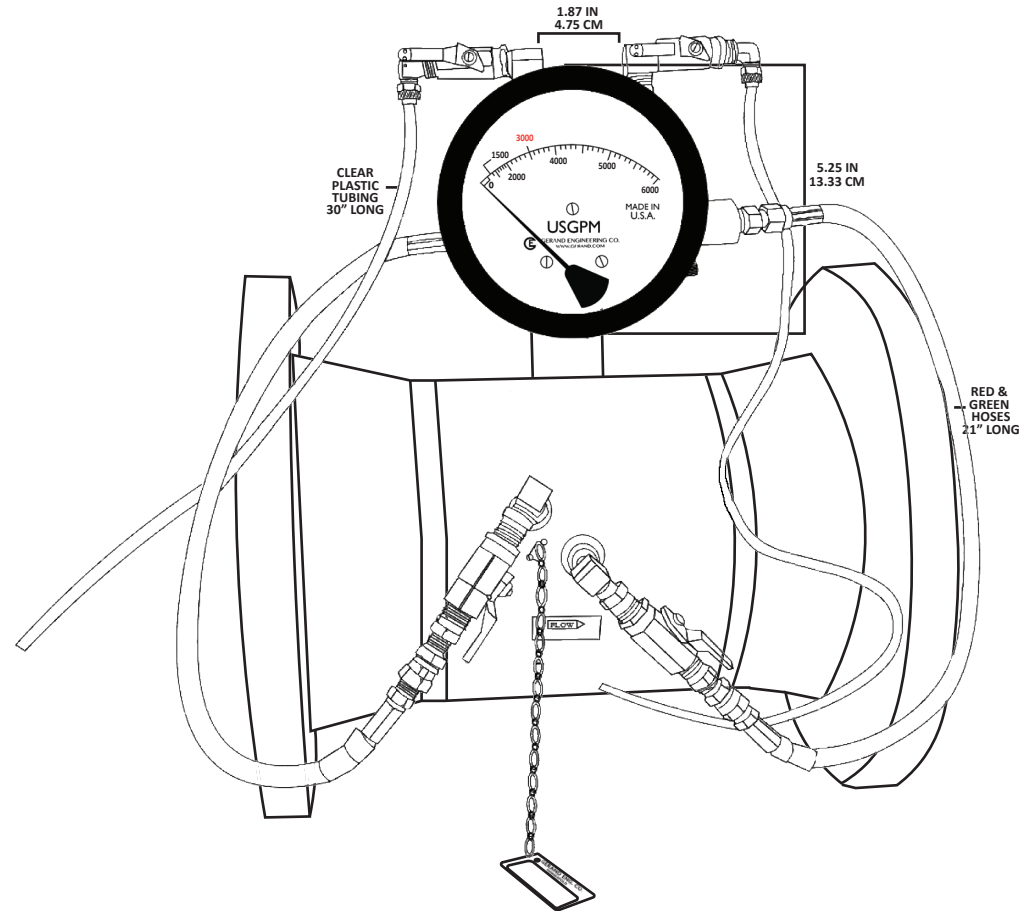


### METER DATA

|                 |                    |
|-----------------|--------------------|
| CONSTRUCTION:   | ALUMINUM BODY      |
| OPERATION:      | BUNA "N" DIAPHRAGM |
| ACCURACY:       | ±2.0%              |
| TEMPERATURE:    | 200° F MAX         |
| PRESSURE:       | 1500 PSI MAX       |
| APPROX. WEIGHT: | 3 LBS/EACH         |

4 1/2" DIAL STANDARD - 6" AVAILABLE

WELD-NECK FLANGES  
RAISED FACE

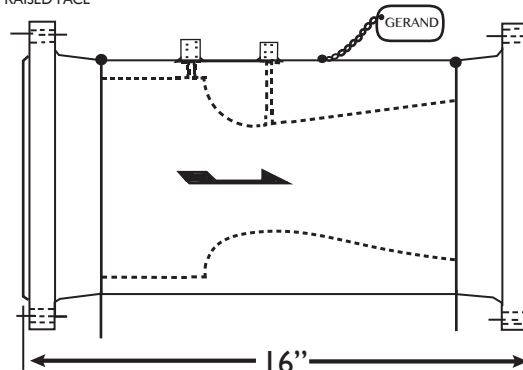

### WEIGHTS & DIMENSIONS

|                         |                                |
|-------------------------|--------------------------------|
| WEIGHT:                 | 181 LBS                        |
| SHIPPING<br>DIMENSIONS: | 33" x 33" x 29"<br>with PALLET |